

ESC250D-S


Field-mountable optical fiber connector
现场组装式光纤活动连接器

Installation Manual
操作说明书


- ◆ To use this product correctly, the instructions must be read carefully before use.
为正确使用本产品, 使用前务必阅读本说明书。
- ◆ Please assemble the connector according to these instructions, using the matched tools.
请按照说明书, 使用配套工具组装连接器。
- ◆ The specific operation example is referred to ESC250D-S-APC.
具体操作示例以ESC250D-S-APC为参考。
- ◆ The product picture of this instruction is only for reference, please make the object as the standard.
本说明书产品颜色仅做示意, 请以实物为准。

Product components 产品组成部件

ESC250D-S-UPC




ESC250D-S-APC

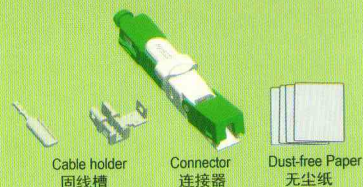


Operation steps 操作步骤

Cable Stripper
皮线开剥钳



The cable length as the mark.
对齐标尺


1. Strip the cable jacket. 开剥光缆外皮。



4. Fix the cable. 固定光缆。



7. Press the opener, then insert the fiber into the tail of connector till the limit.
按压钥匙, 确保钥匙压入到位。再将光纤从连接器尾部穿入, 直至导线块限位处。

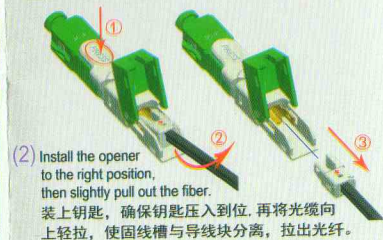

(2) Install the opener to the right position, then slightly pull out the fiber.
装上钥匙, 确保钥匙压入到位。再将光缆向上轻拉, 使固线槽与导线块分离, 拉出光纤。


Cutting Jig
定长工具条



No space.
定长工具条限位。

Fiber under the cutting jig bar.
光纤从导向口下方穿入。

2. Strip the fiber coating. 定长开剥涂覆层。

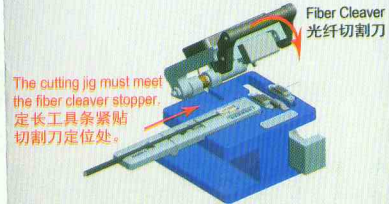


The cutting jig must meet the fiber cleaver stopper.
定长工具条紧贴切割刀定位处。


5. Cut the fiber. 定长切割光纤。



8. Press the cover, remove the opener, complete the assembly.
先合上方盖, 再取下钥匙, 完成组装。

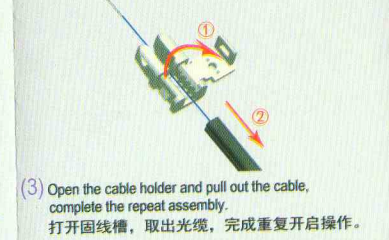


(3) Open the cable holder and pull out the cable, complete the repeat assembly.
打开固线槽, 取出光缆, 完成重复开启操作。

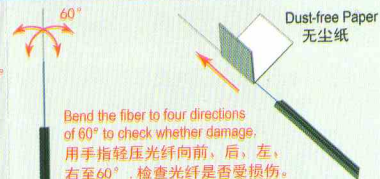

Bend the fiber to four directions of 60° to check whether damage.
用手指轻压光纤向前、后、左、右至60°, 检查光纤是否受损伤。

3. Check the fiber and clean the fiber.
检查光纤是否受损伤, 并清洁光纤。

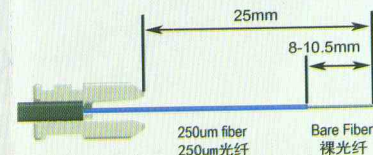

6. Cutting length. (Picture shown only for reference)
光纤切割尺寸 (仅数值参考)。

Repeat assembly
重复开启步骤



(1) Remove the rear cover from two sides.
用指尖从弹簧座缺口处两侧向外轻轻掰开方盖, 使方盖与弹簧座分离。

Notes for cable holder 两用固线槽使用须知:

2.0*3.0mm drop cable 蝶形光缆:



2.0*1.6mm drop cable 蝶形光缆:

Set the filler piece.