


(Mini)SC/APC — SC/UPC SX 3.0mm 2M G657A2 LSZH White Cable

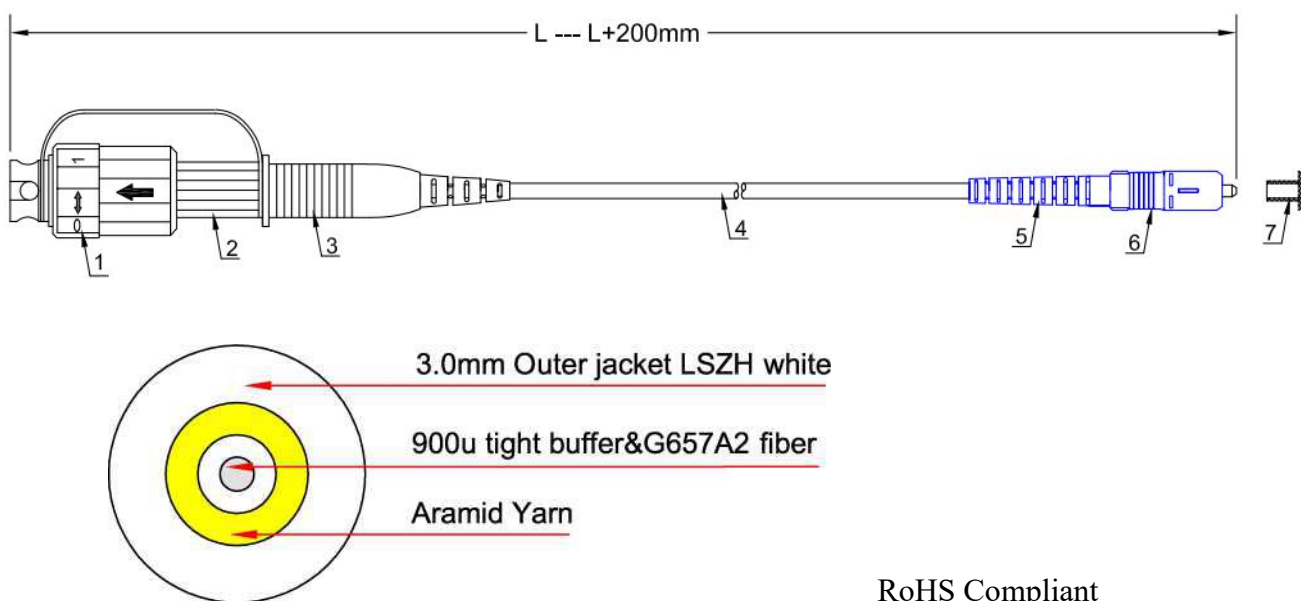

RoHS Compliant

NOTE:

1. Insertion loss :Mini(SC/APC)<0.30dB Return loss :Mini(SC/APC)>60dB
SC/UPC<0.25dB A:1310&1550nm
SC/UPC>50dB A:1310&1550nm
2. Durability:500 matings
3. Operation temperature:-20°C to +70°C
4. 4.SC connector according to IEC 61754-4

(Mini)SC/APC — SC/UPC SX 3.0mm G657A2 LSZH White		
ITEM	Description	QTY
1	(Mini)SC/APC dust cover black	1 PC
2	(Mini)SC/APC outer housing black	1 PC
3	(Mini)SCZAPC boot black	1 PC
4	OD=3.0mm simplex G657A2 fiber optical cable LSZH white	1 PC
5	SC boot blue	1 PC
6	SC/UPC SM simplex connector blue	1 PC
7	SC dust cover lucency	1 PC